


Vascular Intervention // **Coronary**  
Covered Coronary Stent System

# PK Papyrus<sup>®</sup>

Designed to save lives when seconds count.

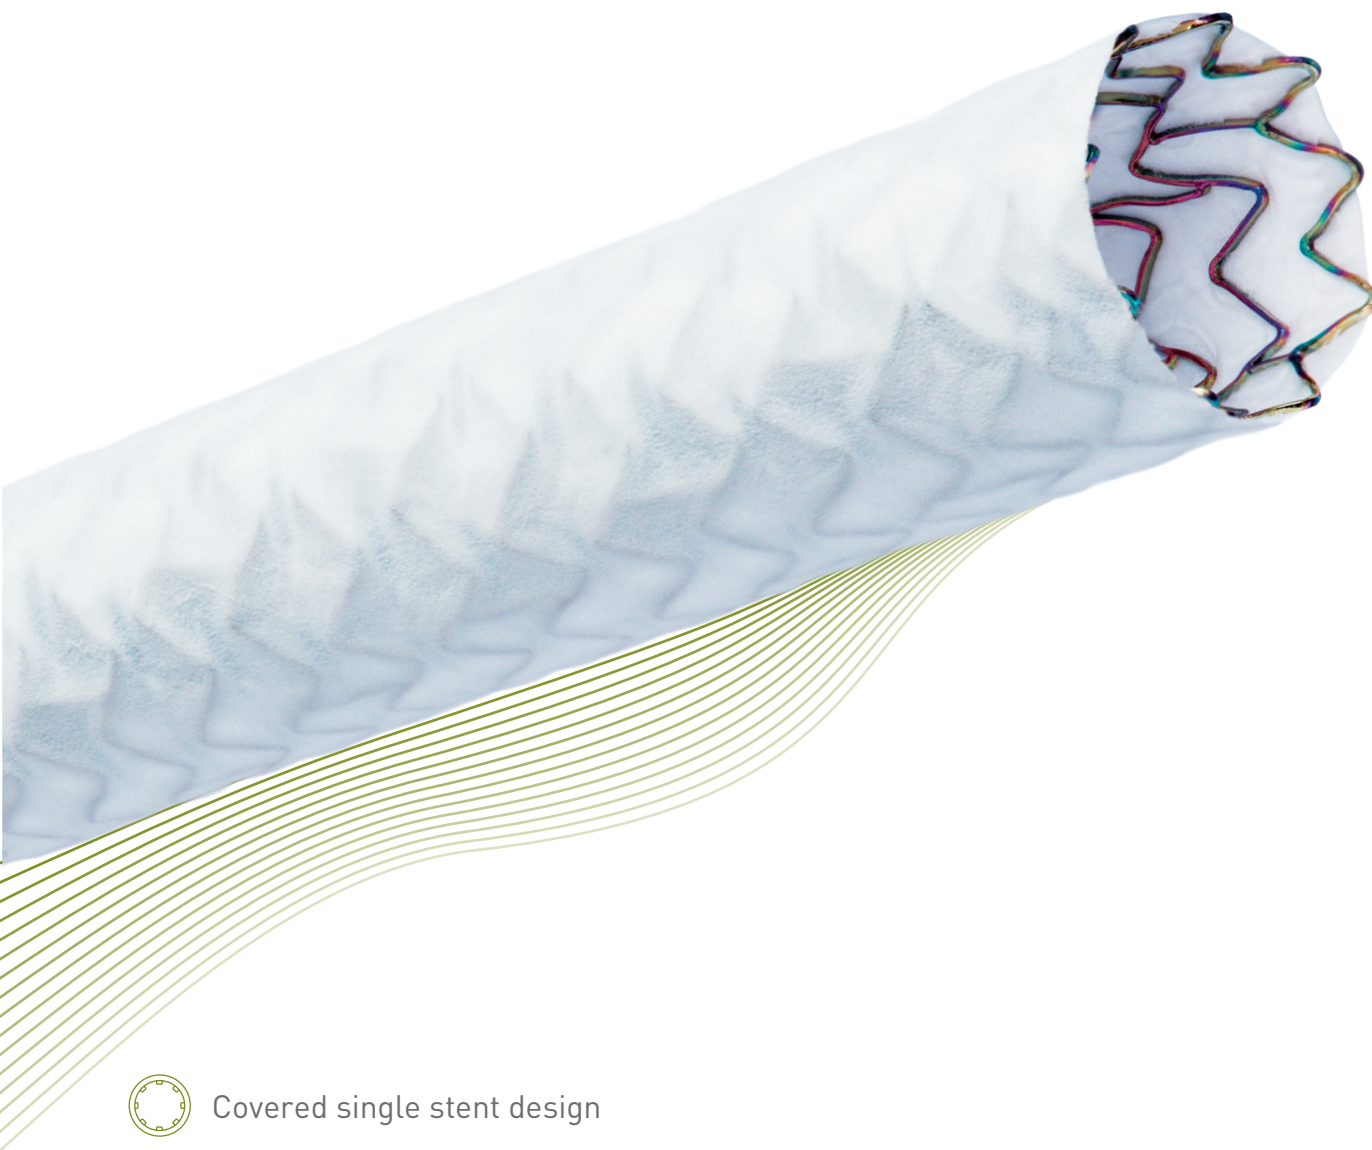

Covered single stent design



Low crossing profile




Exceptional deliverability

# PK Papyrus


Designed to save lives when seconds count.

## Covered single stent design

With its covered single stent design, PK Papyrus achieves greater bending flexibility and a smaller crossing profile compared to the traditional sandwich design stent, allowing you to seal perforations with confidence.



Traditional sandwich design stent



PK Papyrus  
Covered single stent design

## Low crossing profile<sup>1</sup>



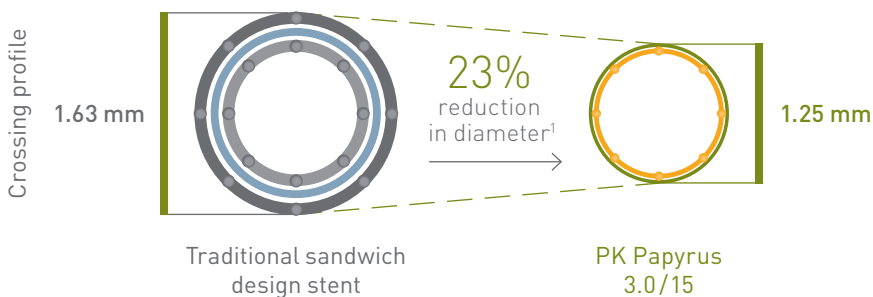


Illustration depicts crimped devices prior to inflation

## Innovative polyurethane membrane

Electrostatic forces spin polyurethane fibers onto the stent surface, creating a thin and highly elastic membrane.

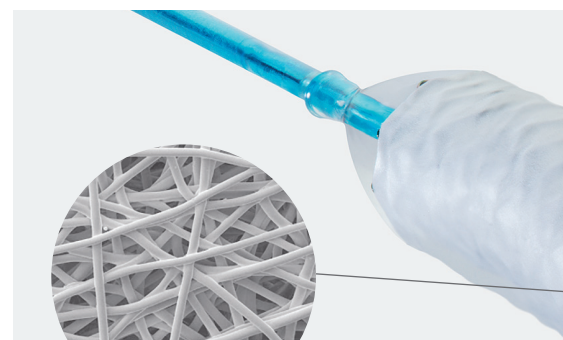


Polyurethane fibers  
(2000x) — 10 µm

58%  
greater  
flexibility<sup>2</sup>


## Exceptional deliverability

### 58% greater flexibility<sup>2</sup>

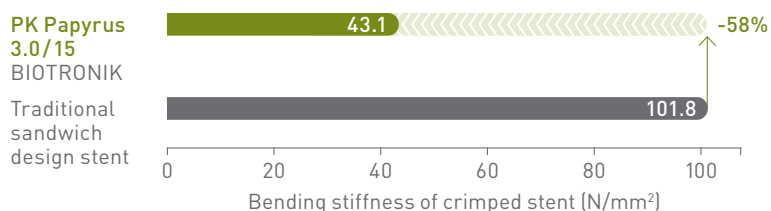

### Shorter median time to deliver

Single center, retrospective investigation of 61 patients treated with covered coronary stents.<sup>3,4</sup>

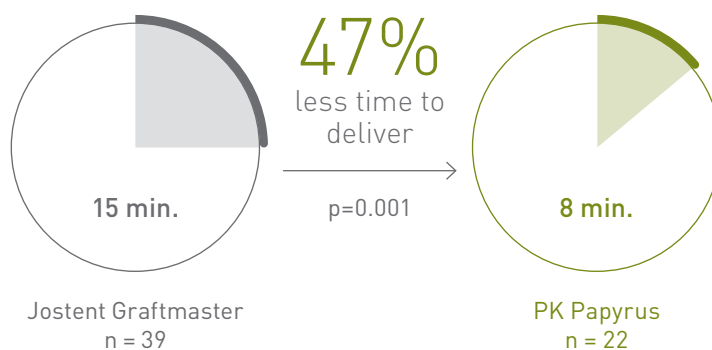

“In rare cases of a coronary perforation, time is the enemy.”

Dr. Dean Kereiakes, Interventional Cardiologist and Medical Director of The Christ Hospital and Vascular Center, Cincinnati, Ohio, USA.

### 5F Compatibility

5F

For main sizes - no need for guide catheter upgrade (ø 2.5-4.0 mm).

# PK Papyrus

Indicated for acute coronary artery perforations.\*

Vascular  
Intervention  
Coronary



## Technical Data

### Stent

Stent cover material	Non-woven, electrospun polyurethane
Stent strut thickness	ø 2.5 - 3.0 mm: 60 µm (0.0024"); ø 3.5 - 4.0 mm: 80 µm (0.0031"); ø 4.5 - 5.0 mm: 120 µm (0.0047")
Stent material	Cobalt chromium (L-605) with <b>proBIO</b> ® (Amorphous Silicon Carbide) coating
Maximum stent expansion diameter	ø 2.5 - 3.0 mm: 3.50 mm; ø 3.5 - 4.0 mm: 4.65 mm; ø 4.5 - 5.0 mm: 5.63 mm

### Delivery system

Guide wire diameter	0.014"
Usable catheter length	140 cm
Recommended guide catheter	ø 2.5 - 4.0 mm: 5F (min. I.D.** 0.056"); ø 4.5 - 5.0 mm: 6F (min. I.D.** 0.070")
Nominal pressure (NP)	ø 2.5 - 3.5 mm: 8 atm; ø 4.0 - 5.0 mm: 7 atm
Rated burst pressure (RBP)	ø 2.5 - 4.0 mm: 16 atm; ø 4.5 - 5.0 mm: 14 atm

\*\*I.D. = Inner Diameter

## Ordering Information

Stent  
ø (mm)

Catheter length 140 cm  
Stent length (mm)

5F

6F

	15	20	26
2.5	369380	369386	-
3.0	369381	369387	381789
3.5	369382	369388	381790
4.0	369383	369389	381791
4.5	369384	369390	369392
5.0	369385	369391	369393

1. Compared to Graftmaster 2.8/16 (BIOTRONIK data on file); 2. Compared to Jostent Graftmaster 3.0/16 (BIOTRONIK data on file); 3. Hernández-Enríquez M, Lairez O, Campelo-Parada F, et al. Outcomes after use of covered stents to treat coronary artery perforations. Comparison of old and new-generation covered stents. J Interv Cardiol. 2018;1-7. doi: 10.1111/joic.12525; 4. Population is representative of real world interventional practice and was not a randomized prospective clinical trial.

PK Papyrus and **proBIO** are trademarks or registered trademarks of the BIOTRONIK Group of Companies. Jostent and Graftmaster are trademarks or registered trademarks of the Abbott Group of Companies.

\*Indication as per IFU.